

Pin (1-2)

LAYOUT DIAGRAM (原理图):(FIG-1)


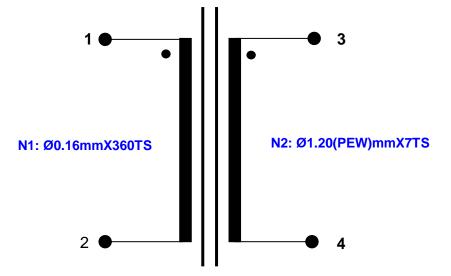


FIG-1

CROSS SECTION DAGRAM剖视图: (FIG-2)



PIN (3-4)
Narrow side

FIG-2

CUSTOMER Prepared By: MODEL NO:E128 Date: TITLE: Approved: REV. 01 Checked By: Date: TRANSFORMER PAGE OF 3 Approved By: Date: Date:



Data Specification (特性要求): (Table-1)

ITEM 項 目	MEASUREMENTS 测 试 腳 位	CHARACTERISTICS 测试範圍	MEASURING CONDITIONS 测试條件 T=25±3℃;HR(%)=45±15	REMARK 備 注			
LS 電 感	PIN(1-2)	60.0mH MIN.	F(KHz)=1 Ug(V)=0.25	SERIAL MODE 串 联 模 式			
DCR 直流电阻	PIN(1-2)	17.0Ω MAX	/	4 WIRE MODEL 四线模式			
PH 相 位		REFER TO LAYOUT DIAGRAM FIG-1 参考原理圖(FIG-1)					


REMARK:

100% testing for the above electrical characteristics. 所有产品按以上要求进行100%测试.

Quality Requirement:(品质要求)

Ref ANSI/ASQC. Z1. 4 2008 Level II . Major AQL=0. 4% Minor AQL=1. 0%. 参照ANSI/ASQC. Z1. 4 2008 Level II . Major AQL=0. 4% Minor AQL=1. 0%.

Prepared By:	Date:	TITLE:	CUSTOMER	MODEL NO:EI28	
Checked By:	Date:		Approved:	REV.	01
Approved By:	Date:	TRANSFORMER	Date:	PAGE 2 OF 3	

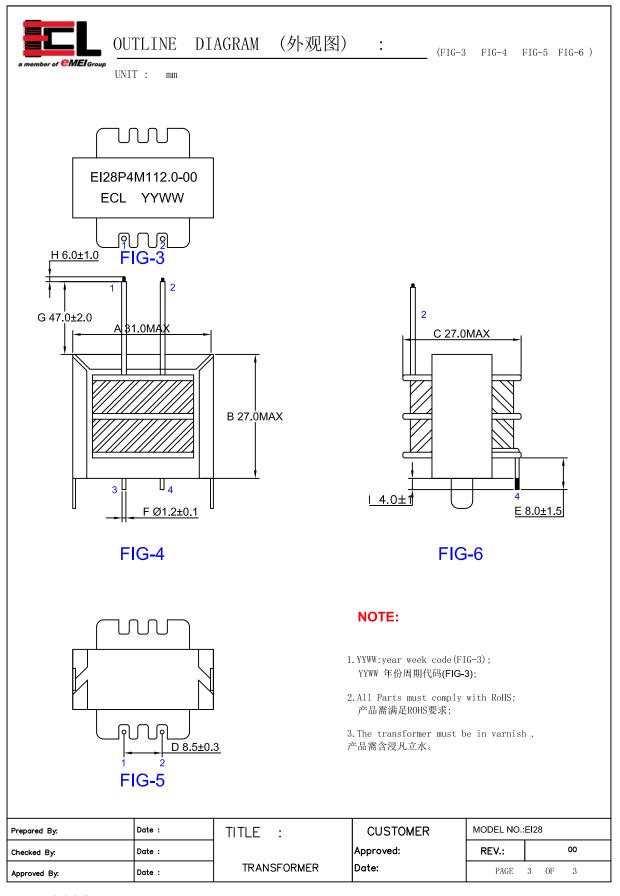

免责条款

Disclaimer

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.