



## DATA SPECIFICATION(特性要求): (TABLE-1)


ITEM 项目	MEASUREMENTS 测 试 脚位	CHARACTERISTICS 测 试 范围	MEASURING CONDITIONS 测试条件 T=25±3℃;HR(%)=45±15	REMARK 备注		
Ls 電感	PIN(3-1)	250mH MIN.	F(KHz)=1.0 Ug(V)=1.0	SERIAL MODE 串联模式		
	PIN(4-6)	250mH MIN.	F(KHz)=1.0 Ug(V)=1.0	SERIAL MODE 串联模式		
DCR <b>直流電阻</b>	PIN(3-1)	52.0Ω MAX	/	SERIAL MODE 串联模式		
	PIN(4-6)	63.0Ω MAX	/	SERIAL MODE 串联模式		
Impedance 阻抗	PIN(3-1)	600Ω±10%	F(KHz)=1.0 Ug(V)=1.0 PIN(4-6):LOAD 600Ω			
	PIN(4-6)	600Ω±10%	F(KHz)=1.0 Ug(V)=1.0 PIN(4-6):LOAD 600Ω			
COPLANARITY 共 平面度	ALL PINS	0.20mm MAX.	/	/		
HIPOT 耐压	(3-1)/(4-6)	NO BREAKDOWN 漏电流≤5.0mA	VDC=500V/2SEC F (HZ)=50	/		
PH 相位	REFER TO LAYOUT DIAGRAM (FIG-1)					

Prepared By ENG:	Date:	TITLE:	CUSTOMER	MODEL NO.:ED8	
Checked By QA:	Date:		Approved:	REV.	00
Approved By ENG:	Date:	AUDIO TRANSFORMER	Date:	PAGE 1	OF 3



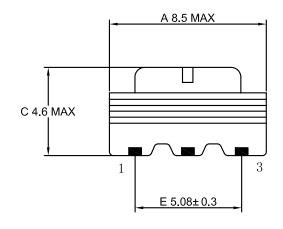

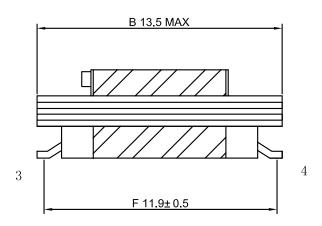

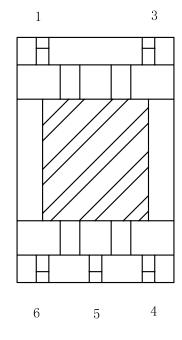


## **NOTES:**

1. Cut off PIN2; 剪掉PIN2脚;

2. The product should be according to RoHS 产品要符合RoHS

Prepared By ENG:	Date :	TITLE :	CUSTOMER	MODEL NO.:ED8	
Checked By QA:	Date :		Approved:	REV.:	00
Approved By ENG:	Date :	AUDIO TRANSFORMER	Date:	PAGE	2 OF 3

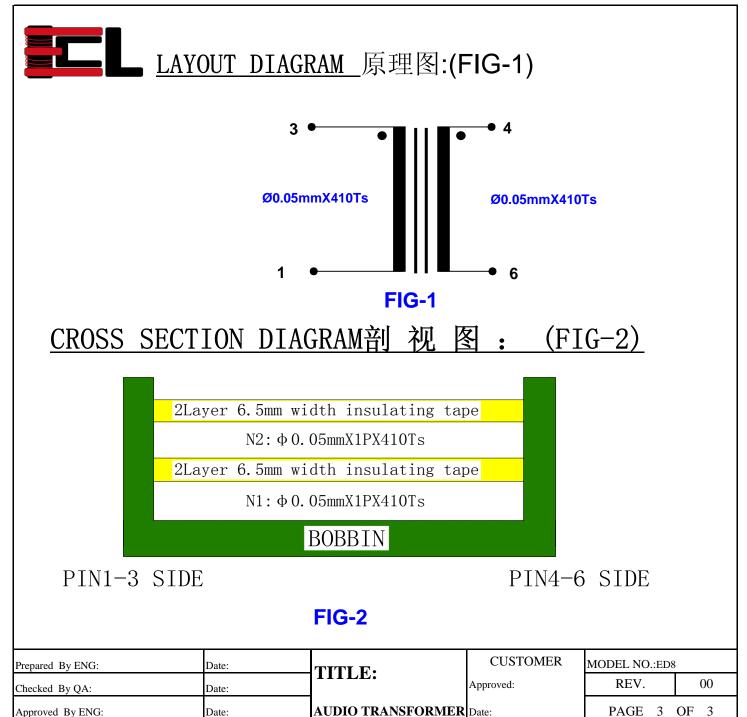

## 免责条款 Disclaimer

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer. 依美电感保留更改产品资料和外观的最终权利而无需事先通知。如有任何争议,依美电感保留最终决定权。此中文免责条款为英文版本译本,如中、英文两个版本有任何抵触或不相符之处,应以英文版本为准。